

# Keilton + autani

## WP1025 Series

5-Key Battery-Powered BT Wall Switch



WP1025



WP Wall Plate  
(not included)

### Description

The Keilton+autani WP1025 is a battery powered Bluetooth wireless wall switch. It provides wireless control of Keilton+autani devices, enabling ON/OFF, DIM+/DIM-, AUTO, and 3 scene functions. The WP1025 can also be used as a remote controller.

### Features

- Bluetooth 5.0 network technology enables the switch to be linked to one or more light groups via the Keilton+autani app
- Powered by a single CR2032 battery
- 3-scene scroll button
- Separate DIM+/DIM-, ON/OFF, AUTO buttons
- LED indicator will flash for low-power battery condition
- Can be mounted on a flat surface or switch box (WP required) or used as a remote
- Easily retrofit existing wall switches with Decora wall plates (not included)

### Requirements

- 1 CR2032 battery (not included)
- WP wall plate (not included)

### Specifications

Input Voltage	DC 3V
Bluetooth Transmit	100ft Max
Radio Frequency	2.4GHz ± 75MHz
Bluetooth Version	5.0
Housing Material	UL 94-V0
Operating Temperature	-18°C to 50°C, -0.4°F to 122°F
Storage Temperature	0°C to 30°C, 32°F to 86°F
IP Rating	IP20
Color	White
Warranty	5 year warranty
Compliance	UL1376, RoHs
Safety	FCC ID: 2A26YLTKTVT2022 DID: D061367 DLC: NLTRC5KL0TN

### Ordering Information


Model	Description
WP1025.B1	5-Key Battery-Powered BT Wall Switch

### Ordering Information - Accessories


Model	Description
WP	Screwless Snap-On Wallplate

## Dimensions

Unit:inch/mm

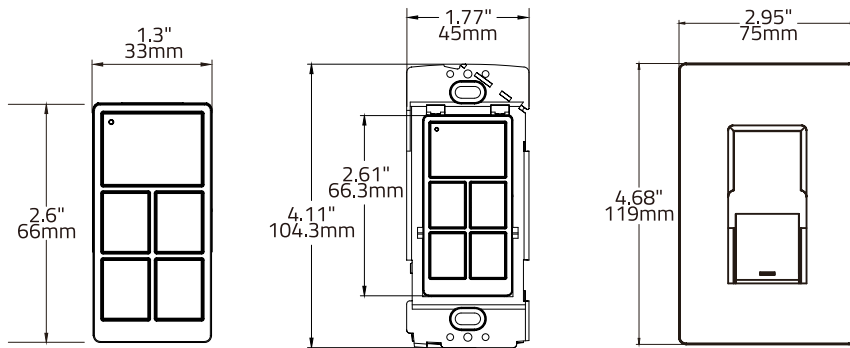

## Product Label

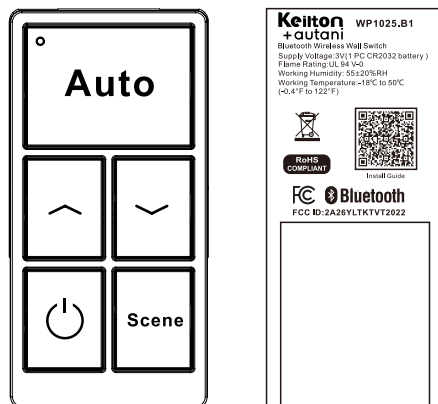

### WP1025.B1

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LiteTrace is under license. Other trademarks and trade names are those of their respective owners.

## App Download



Due to our continued efforts to improve our products, specifications are subject to change without notice.

## Contact Us

7090 Columbia Gateway Drive, Suite 140, Columbia, MD 21046, USA

T: +1 443-320-2233 (M-F 9am-5pm ET)

E: [support@autani.com](mailto:support@autani.com)